


Robust pulling system disassembly procedure

This manual goes over the disassembly procedure of our robust pulling system (later just sleeve).

Prepare a tongs, razor or snap-off knife.

On the heat-shrink sleeve (on the side of the fanout), do a small notch near by the rip cord.


Pull for the rip cord and slit the whole heat-shrink sleeve.

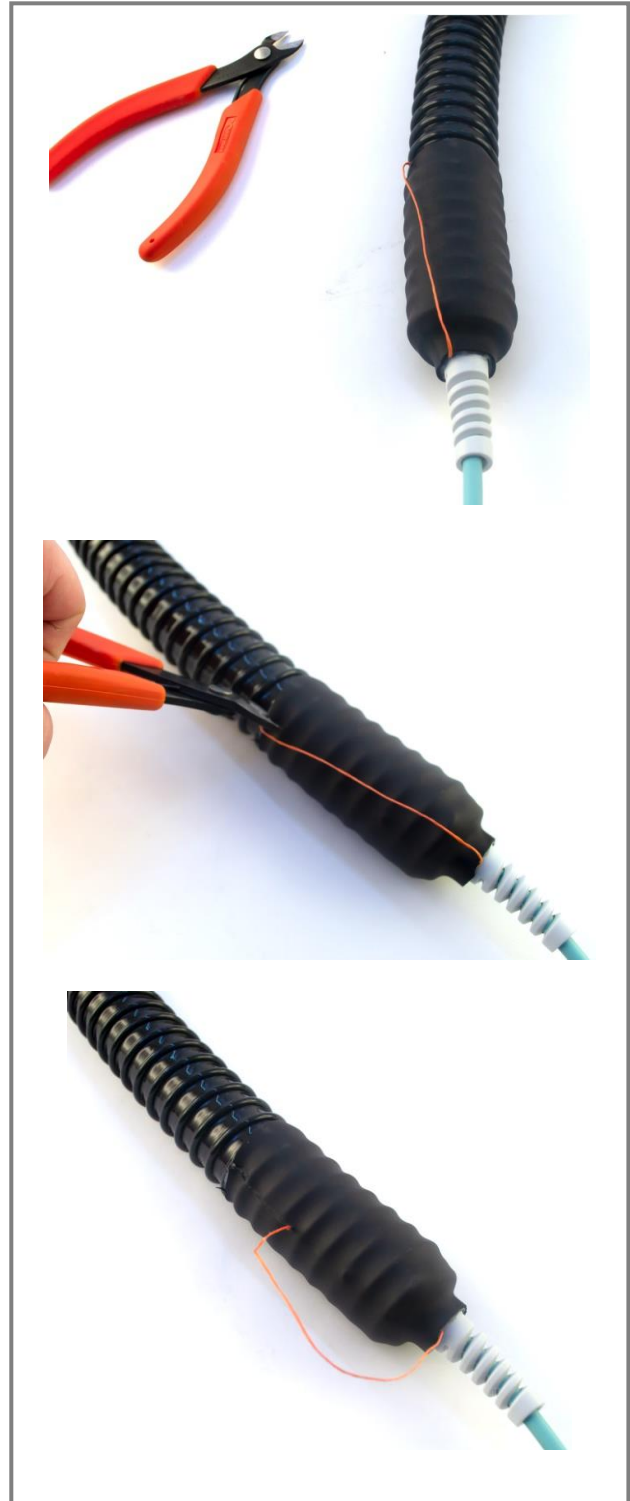

Remove the heat-shrink sleeve from the protection tube and pull down the protective tube from the fan-out.

Release the grommet which is the part of the fan-out point Duralino.

Remove the two parts black parts and fix the grommet back to the fan-out point Duralino.

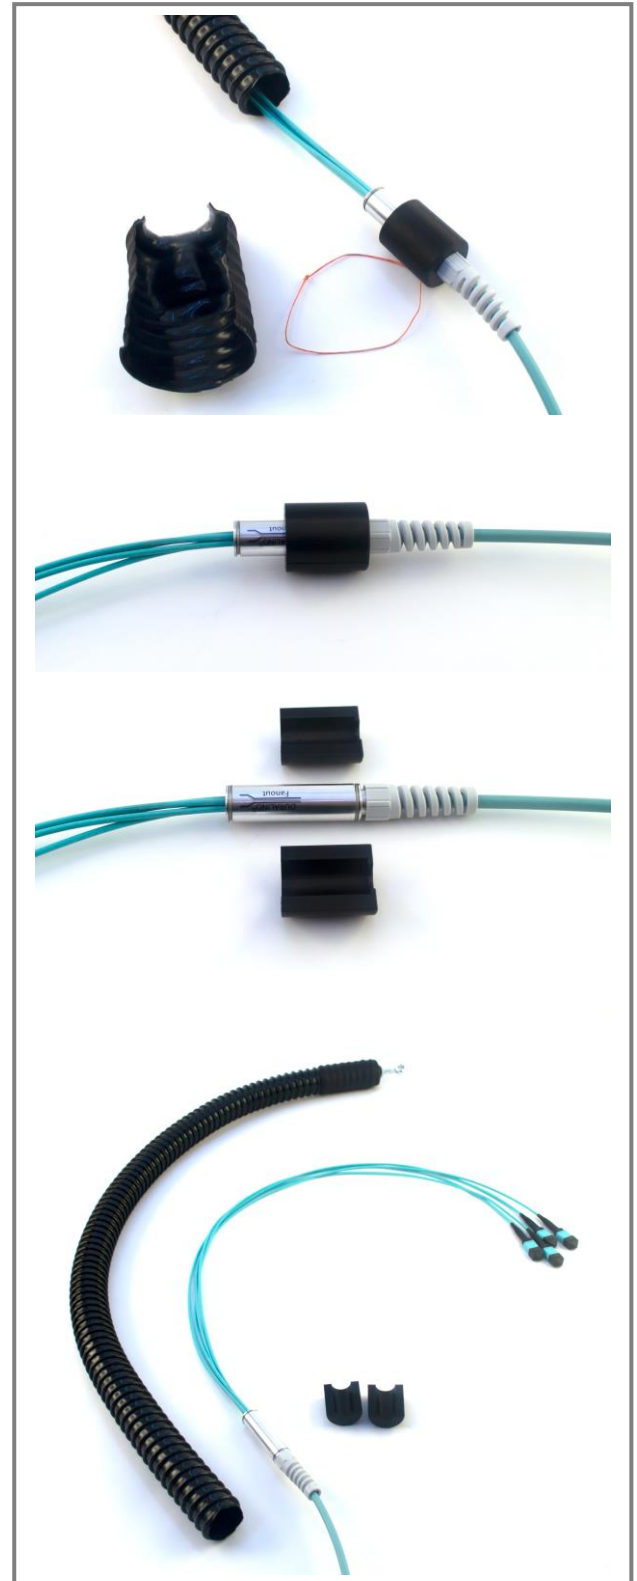

For more information, contact our sales team at sales@sylex.sk

* Specifications are subject to change without notice.